



RLB1a Horn

specification

Update Record

No.	Version	Remark	Date
1	Ver.1.0	Initial Release	2022.02.29

Note: The document is subject to change without prior notice.


Shanghai Xixun Electronics Co., Ltd.

Product Picture




Product Parameters

Test items	Specifications
Rated power	33W
Maximum power	35W
Sensitivity	88 ± 3dB (AT 0.1W/0.1 M,Average of 0.6. 0.8. 1.0、 1.2 KHz)
Impedance	4Ω± 15%
Response frequency	Fo~~13KHZ
Resonance frequency	80 ± 20%
Distortion	≤5%
Magnet size	Φ60'32'10mm
Weight	250g ± 8%
Outer diameter	102'102'39 .5Hmm
Voice coil	Φ1945mm aluminum film ASV+Cu
Drum paper	Rubber edge PP basin Rubber+PP
Rated voltage	11.49V
Temperature	Operating temperature: -30°C to + 75°C Storage temperature: -40°C to +85°C

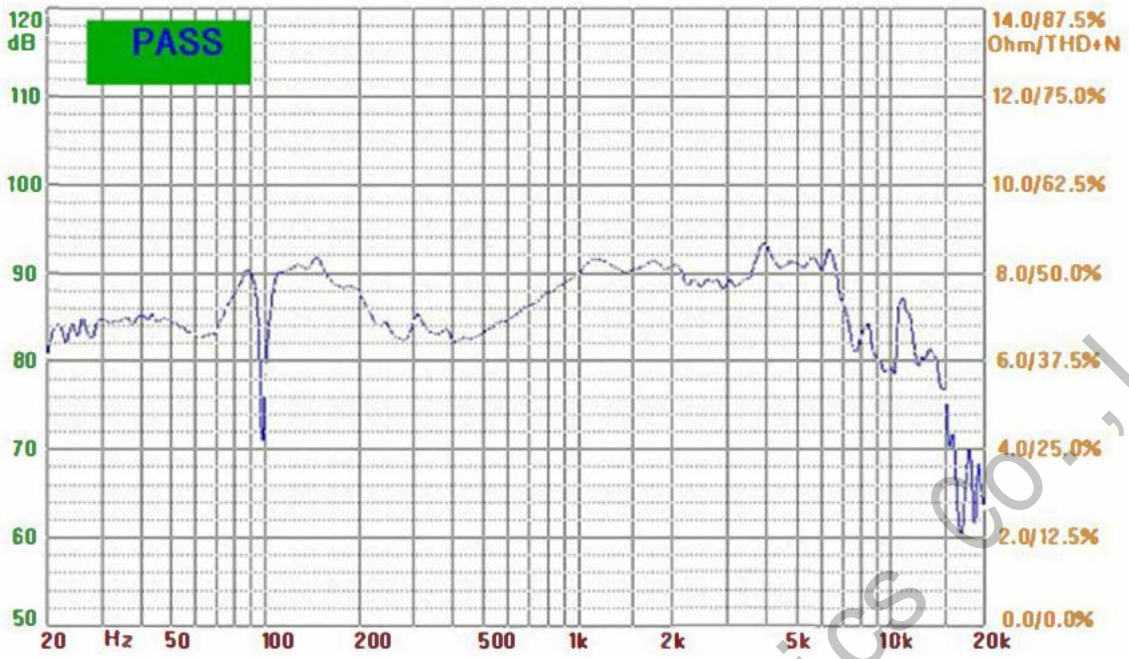


Shanghai Xixun Electronics Co., Ltd

Dimensions

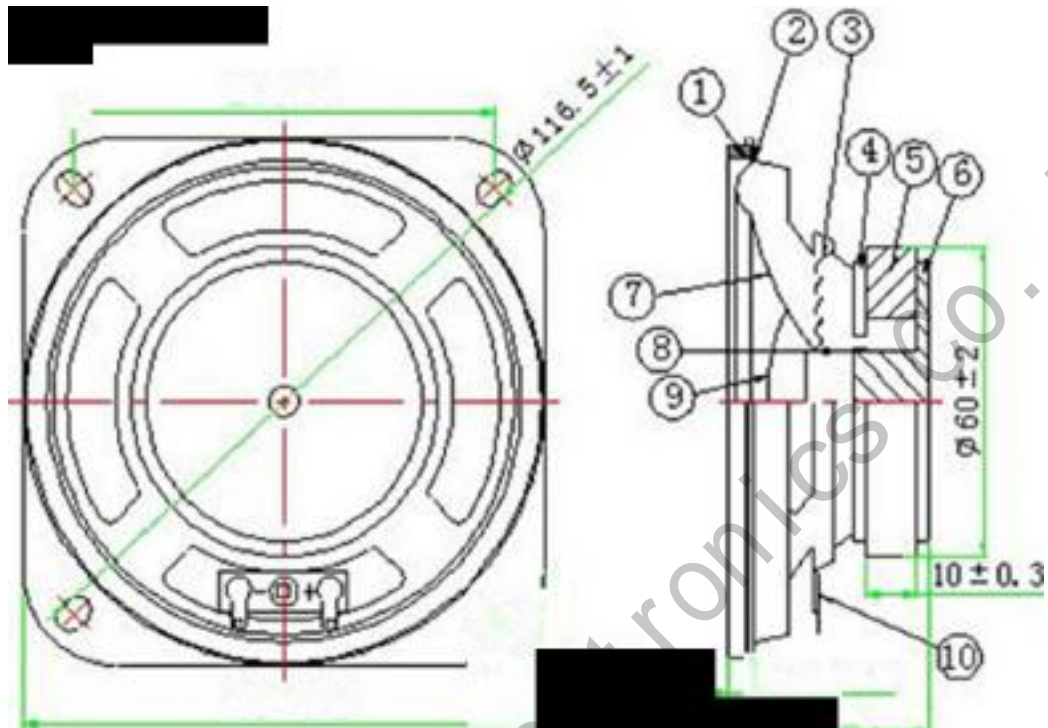

Shanghai Xixun Electronics Co., Ltd

Installation Example

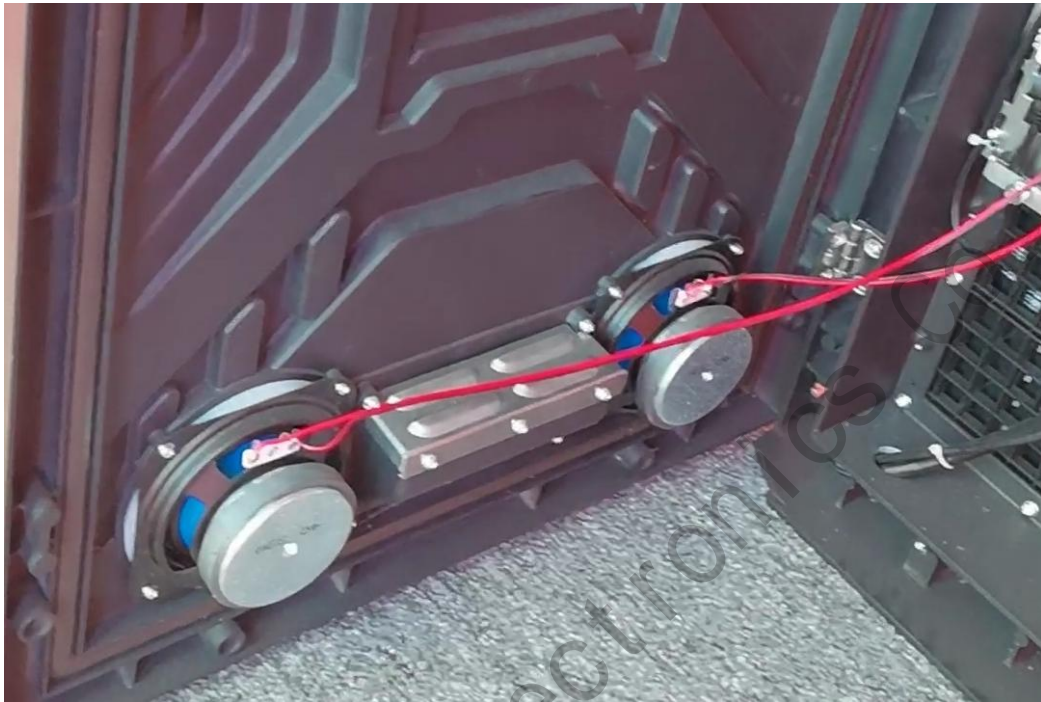

Cautions

1. Pay attention to waterproof.
2. Do not touch the chips and pins on the product to avoid electrostatic damage.



Shanghai Xixun Electronics Co., Ltd.